




Diversified Architectural Lighting Inc.

939 Selkirk Ave., Pointe-Claire, Qc, Canada H9R 4S4
 Tel : 514.693.2117 Fax : 514.693.2177

Project :	Agent :
Type :	Approved by :
Cat No :	Date :

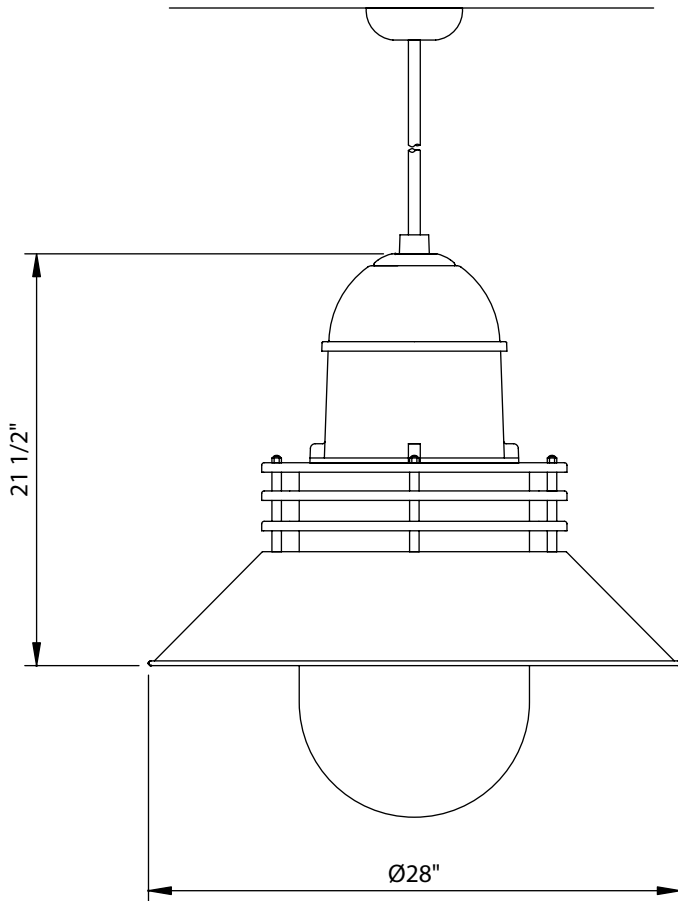

CT3-P contour series

Luminaire:

Ballast housing is fabricated of one piece heavy-duty cast aluminum. Stem is inserted into female cast aluminum device and secured with a screw horizontally positioned. Aluminum spacers fasten the ballast housing to the spun aluminum shade. Three decorative aluminum rings are placed along the spacers to allow minimal uplight. Borosilicate glass refractor is fastened directly to the ballast housing and is enclosed with a polycarbonate globe.

Mounting:

Luminaire includes stem, canopy and ceiling bracket. The bracket is simply fastened to the ceiling or junction box and the ball slides into its appropriate area. It is then secured with a set screw. Regular stem can hang straight with a sloped ceiling up to 30 degrees.

Optics:

Type III or type V distribution available.

Protection:

The luminaire is completely protected from water and dust. A threaded spun aluminum holder overlaps the tempered glass refractor. Cast aluminum ballast housing is sealed with a cast aluminum plate which is gasketed.

Maintenance:

Quick and easy lamp maintenance through removing globes.

Electrical:

Standard metal halide and high-pressure sodium luminaires are supplied with core and coil CSA / UL listed ballasts. All ballasts are guaranteed for at least 2 years directly from the ballast manufacturer. Components are horizontally opposed for thermal reduction. All components are mounted on a single plate for easy maintenance.

Pulse start metal halide luminaires are supplied with standard uniform pulse start systems suitable for vertical lamp mounting. All components are mounted on a single plate for easy maintenance. Pulse start systems are guaranteed directly from the manufacturer for a period of 5 years.

Compact fluorescent: All compact fluorescent luminaires are supplied with electronic ballasts. Consult factory for dimming ballast to match controls and ballasts. In the case where the luminaire uses multiple ballasts, the ballasts are mounted on a single plate and can be individually removed.

Model #	Mounting	Ring	HID(wattage)	CFL(wattage)	Voltage**	Color	Options	
CT3	Pxx Pendant (stem length in inches)	AL- aluminum	70MH-PS* 50HPS 100MH-PS* 70HPS	26DTT 32TRT 42TRT	TT tri-tap 120 277 347	MT multi-tap 120 208 240 277	CC-Custom Color *** BLK-Black WHT-White SIL-Silver BRZ-Bronze	QRT-Quartz re-strike F-Fusing PC-Photocell
		BA- blue acrylic	150MH-PS* 100HPS 175MH-PS* 150HPS					
		CA- clear acrylic	250MH-PS* 250HPS					

*PS stands for pulse start
 ** Not all voltages are available for all lamp types
 ***Either supplying factory with a color chip or a RAL number can specify custom color. (Some custom colors will be subject to a small lot setup charge)

Ordering example:
 CT3-P12-AL-100MH-PS-120-BRZ
 This would order: Contour 3, pendant 12" stem, aluminum rings, 100W MH-PS, 120V, painted bronze.

contour