




# Diversified Architectural Lighting Inc.

939 Selkirk Ave., Pointe-Claire, Qc, Canada H9R 4S4  
 Tel : 514.693.2117 Fax : 514.693.2177

|           |               |
|-----------|---------------|
| Project : | Agent :       |
| Type :    | Approved by : |
| Cat No :  | Date :        |

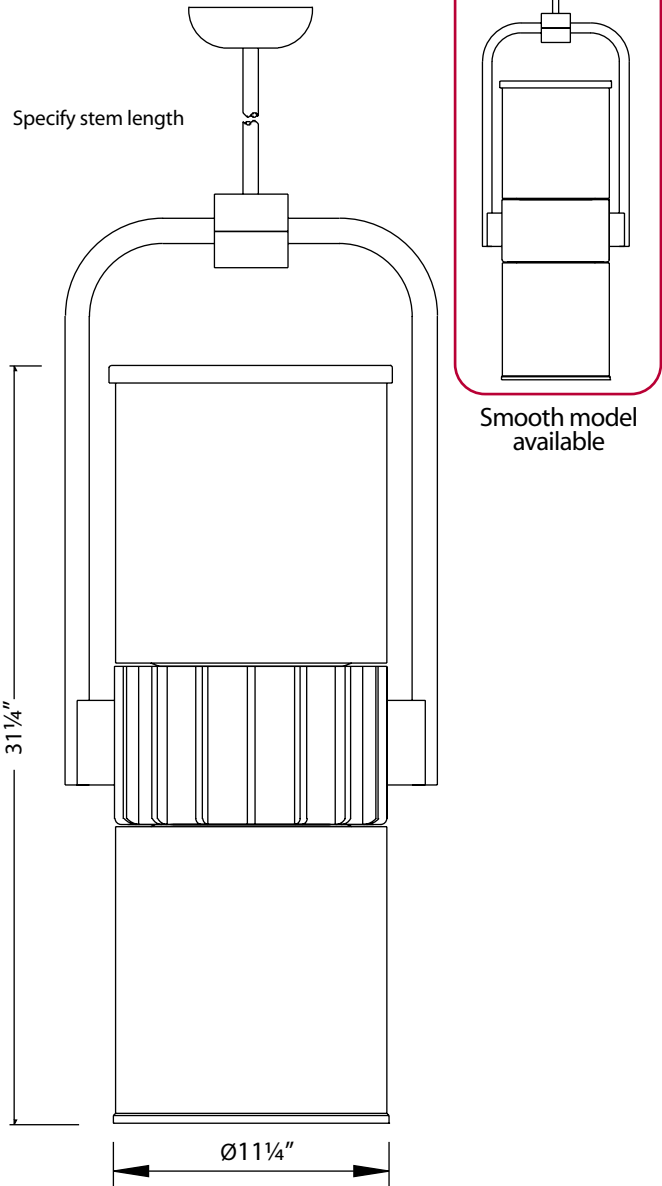

## DK11-PAD dramatek series Pendant with "U" bracket Up and Down

### Luminaire

Cast aluminum ballast housing is attached to spun aluminum cylindrical housing in up and down positions. Spun aluminum reflector is fastened to spun aluminum screw base refractor holder. Two cast aluminum stem adapters are attached on each side of the ballast housing. A U-Tube is then attached to a straight stem and connected through another cast aluminum connector. All lampholders are medium base rated 4KV c/w copper nickel plated screwshell. 250 Watt lampholders are mogul.

### Optics

Anodized aluminum reflector offers optimal light distribution. Black multi-step baffle is installed at the bottom of the cylinder to ease glare. Optics can be modified with a prismatic lens, prismatic refractor or frosted lens. May be used with ED-17 or PAR 38 HID lamps.

### Protection/Enclosure

These units are certified for indoor or outdoor use. Typically the luminaire is supplied with a black multi step baffle and a prismatic refractor on the bottom and a flat glass on top. The top flat glass is overlapping to avoid any water penetration. The cylinder can also be enclosed with a flat glass which can be prismatic, frosted or clear. The bottom can also be left open for interior use.

### Electrical:

Standard metal halide and high-pressure sodium luminaires are supplied with core and coil CSA/UL listed ballasts. All ballasts are guaranteed for at least 2 years directly from the ballast manufacturer. Components are horizontally opposed for thermal reduction. All components are mounted on a single plate for easy maintenance.

Pulse start metal halide luminaires are supplied with standard uniform pulse start systems suitable for universal lamp mounting. All components are mounted on a single plate for easy maintenance. Pulse start systems are guaranteed directly from the manufacturer for a period of 5 years.

**Compact fluorescent:** All compact fluorescent luminaires are supplied with electronic ballasts. Consult factory for dimming ballast to match controls and ballasts. Where the luminaire uses multiple ballasts, the ballasts are mounted on a single plate and can be individually removed.

| Model #                           | Mounting  | HID(wattage)                    |               | CFL(wattage)                    | Voltage**  |            | Color                      | Options                        |
|-----------------------------------|---|---------------------------------|---------------|---------------------------------|------------|------------|----------------------------|--------------------------------|
| <b>DK11</b><br>(ribbed)           | <b>PADxx</b><br>Pendant with "U"<br>bracket up and down | <b>70MH-PS*</b>                 | <b>70HPS</b>  | <b>18DTT</b>                    | <b>TT</b>  | <b>MT</b>  | <b>CC-Custom Color ***</b> | <b>QRT-Quartz re-strike</b>    |
| <b>DK11SH</b><br>(Smooth housing) | <b>Pxx</b><br>Specify stem length                       | <b>100MH-PS*</b>                | <b>100HPS</b> | <b>26DTT</b>                    | tri-tap    | multi-tap  | <b>BLK-Black</b>           | <b>F-Fusing</b>                |
|                                   |   |                                 |               | <b>32TRT</b>                    | <b>120</b> | <b>120</b> | <b>WHT-White</b>           | <b>FG-Flat glass</b>           |
|                                   |   |                                 |               | <b>42TRT</b>                    | <b>277</b> | <b>208</b> | <b>SIL-Silver</b>          | <b>PL-Prismatic flat glass</b> |
|                                   |   | Select wattages for down and up |               | Select wattages for down and up | <b>347</b> | <b>240</b> | <b>BRZ-Bronze</b>          | <b>FL-Frosted lens</b>         |
|                                   |   |                                 |               |                                 |            | <b>277</b> |                            |                                |

\*PS stands for pulse start  
 \*\* Not all voltages are available for all lamp types  
 \*\*\*Either supplying factory with a color chip or a RAL number can specify custom color. (Some custom colors will be subject to a small lot setup charge)

Ordering example:  
 DK11-PAD-100MH-PS-50MH-PS-120-BRZ  
 This would order: Dramatek, 11" up and down pendant with "U" bracket, 100W MH-PS up, 50MH-PS down, 120V painted bronze.

**IMPORTANT NOTICE:** WATTAGE COMBINATION FOR THE DK11-PAD IS LIMITED TO MEET THE ELECTRICAL REQUIREMENTS. MAXIMUM WATTAGE COMBINATION IS 2 x 70W H.I.D. PLEASE CONSULT FACTORY FOR ANY ADDITIONAL WATTAGE COMBINATIONS.