




# Diversified Architectural Lighting Inc.

939 Selkirk Ave., Pointe-Claire, Qc, Canada H9R 4S4  
 Tel : 514.693.2117 Fax : 514.693.2177

Project :	Agent :
Type :	Approved by :
Cat No :	Date :

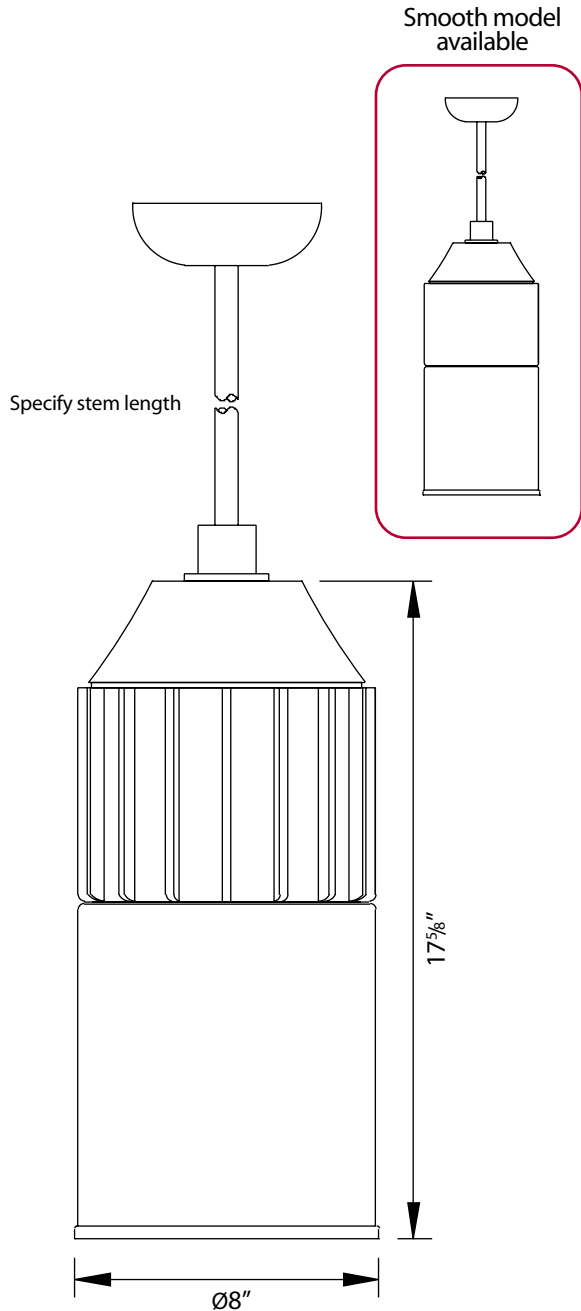

## DK8-PD

## dramatek series — Pendant with dome —

### Luminaire

Cast aluminum ballast housing is attached to spun aluminum cylindrical housing. Spun aluminum reflector is fastened to spun aluminum screw base refractor holder. Cast aluminum dome is a separate piece. Stem is inserted into a female cast aluminum device and secured with a screw horizontally positioned. All lampholders are medium base rated 4KV c/w copper nickel plated screwshell.

### Optics

Anodized aluminum reflector offers optimal light distribution. Black multi-step baffle is installed at the bottom of the cylinder to ease glare. Reflector can be offered with a tilt to accentuate wall illumination. Optics can also be modified with a prismatic lens, prismatic refractor or frosted lens. May be used with ED-17 or PAR 38 HID lamps.

### Protection/Enclosure

These units are certified for indoor or outdoor use. Typically the luminaire is supplied with a black multi step baffle and a prismatic refractor. The cylinder can also be enclosed with a flat glass which can be prismatic, frosted or clear. The bottom can also be left open for interior use.

### Electrical:

Standard metal halide and high-pressure sodium luminaires are supplied with core and coil CSA/UL listed ballasts. All ballasts are guaranteed for at least 2 years directly from the ballast manufacturer. Components are horizontally opposed for thermal reduction. All components are mounted on a single plate for easy maintenance.

Pulse start metal halide luminaires are supplied with standard uniform pulse start systems suitable for universal lamp mounting. All components are mounted on a single plate for easy maintenance. Pulse start systems are guaranteed directly from the manufacturer for a period of 5 years.

Compact fluorescent: All compact fluorescent luminaires are supplied with electronic ballasts. Consult factory for dimming ballast to match controls and ballasts. Where the luminaire uses multiple ballasts, the ballasts are mounted on a single plate and can be individually removed.

Model #	Mounting	HID(wattage)		CFL(wattage)	Voltage**		Color	Options
<b>DK8</b> (ribbed)	<b>PDxx</b> Pendant with dome	<b>50MH-PS*</b>	<b>50HPS</b>	<b>18DTT</b>	<b>TT</b> tri-tap	<b>MT</b> multi-tap	<b>CC</b> -Custom Color *** <b>BLK</b> -Black <b>WHT</b> -White <b>SIL</b> -Silver <b>BRZ</b> -Bronze	<b>QRT</b> -Quartz re-strike <b>F</b> -Fusing <b>FG</b> -Flat glass <b>PL</b> -Prismatic flat glass <b>FL</b> -Frosted lens
<b>DK8SH</b> (Smooth housing)		<b>70MH-PS*</b>	<b>70HPS</b>	<b>26DTT</b>	<b>120</b>	<b>120</b>		
		<b>100MH-PS*</b>	<b>100HPS</b>	<b>32TRT</b>	<b>277</b>	<b>208</b>		
		<b>150MH-PS*</b>	<b>150HPS</b>	<b>42TRT</b>	<b>347</b>	<b>240</b>		
		<b>175MH-PS*</b>				<b>277</b>		

\*PS stands for pulse start  
 \*\* Not all voltages are available for all lamp types  
 \*\*\*Either supplying factory with a color chip or a RAL number can specify custom color. (Some custom colors will be subject to a small lot setup charge)

Ordering example:  
 DK8-PD-100MH-PS-120V-BRZ  
 This would order: Dramatek series, pendant with dome, 100W MH-PS, 120V painted bronze.