




Diversified Architectural Lighting Inc.

939 Selkirk Ave., Pointe-Claire, Qc, Canada H9R 4S4
 Tel : 514.693.2117 Fax : 514.693.2177

Project :	Agent :
Type :	Approved by :
Cat No :	Date :

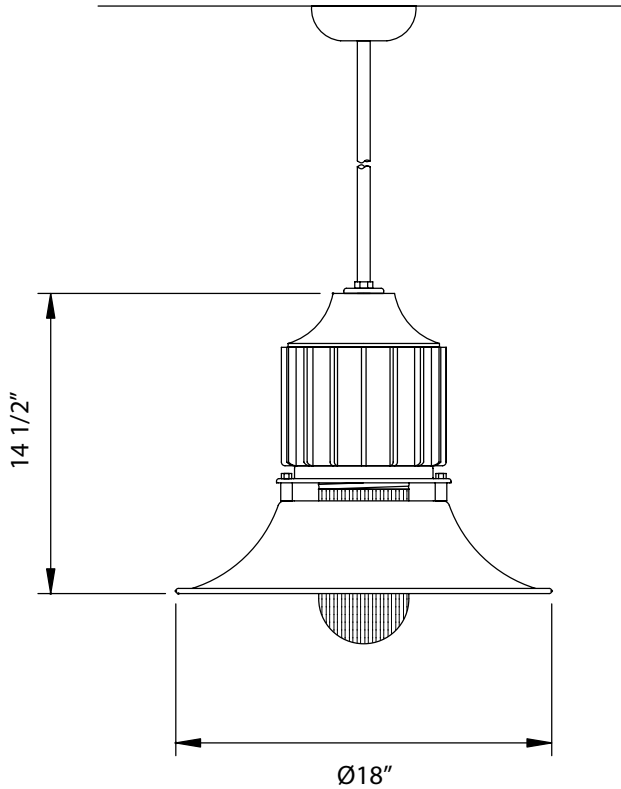

TS-P

tuba series

Luminaire

Ballast housing is fabricated of heavy duty cast aluminum with heat sink ridges. Aluminum spacers connect the spun aluminum shade to the ballast housing. Spun aluminum threaded component holds the tempered borosilicate glass refractor and is mounted directly to the housing.

Mounting:

The tuba series can be pole mounted with a variety of arms (D1, D2, D3, D4, D5, D6) it can also be wall mounted or pendant. See reverse for more options.

Optics:

Borosilicate tempered glass refractor provides type V distribution. House side shield available to create a type III.

Protection:

The luminaire is completely protected from water or dust. A threaded spun aluminum holder supports the tempered glass refractor. Cast aluminum housing is sealed with cast aluminum plate (or decorative dome) which is gasketed.

Maintenance:

Tool-free lamp maintenance with screw-on refractor lens.

Electrical:

Standard metal halide and high-pressure sodium luminaires are supplied with core and coil CSA / UL listed ballasts. All ballasts are guaranteed for at least 2 years directly from the ballast manufacturer. Components are horizontally opposed for thermal reduction. All components are mounted on a single plate for easy maintenance.

Pulse start metal halide luminaires are supplied with standard uniform pulse start systems suitable for vertical lamp mounting. All components are mounted on a single plate for easy maintenance. Pulse start systems are guaranteed directly from the manufacturer for a period of 5 years.

Compact fluorescent: All compact fluorescent luminaires are supplied with electronic ballasts. Consult factory for dimming ballast to match controls and ballasts. In the case where the luminaire uses multiple ballasts, the ballasts are mounted on a single plate and can be individually removed.

Model #	Mounting	HID(wattage)	CFL(wattage)	Voltage**	Color	Options
TS	Pxx pendant Specify length	50MH-PS* 50HPS 70MH-PS* 70HPS 100MH-PS* 100HPS 150MH-PS* 150HPS 175MH-PS*	26DTT 32TRT 42TRT	TT MT tri-tap multi-tap 120 120 277 208 347 240 277	CC -Custom Color *** BLK -Black WHT -White SIL -Silver BRZ -Bronze	QRT -Quartz re-strike F -Fusing

*PS stands for pulse start
 ** Not all voltages are available for all lamp types
 ***Either supplying factory with a color chip or a RAL number can specify custom color. (Some custom colors will be subject to a small lot setup charge)

Ordering example:
 TS-P-50MH-PS-120-BRZ
 This would order: Tuba, pendant, 50W MH-PS, 120V, painted bronze.