



# Diversified Architectural Lighting Inc.


939 Selkirk Ave., Pointe-Claire, Qc, Canada H9R 4S4  
 Tel : 514.693.2117 Fax : 514.693.2177

Project :	Agent :
Type :	Approved by :
Cat No :	Date :

## DB11AL-22

## deco bay series

— Indoor —

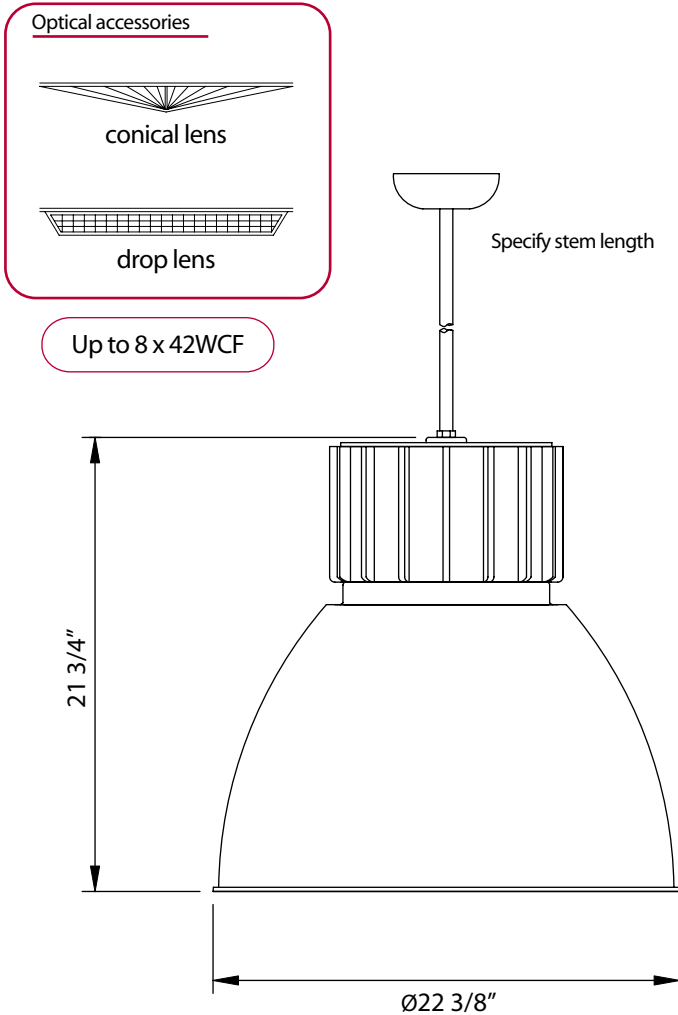

### Housing

Ballast housing is fabricated of heavy-duty cast aluminum with heat sink ridges. Top decorative dome is a separate cast aluminum piece. Stem is inserted into female cast aluminum device and secured with a screw horizontally positioned.

### Reflector

Energy efficient 16" diameter reflector is to be used in low to medium commercial / industrial decorative areas.

### Electrical

Standard metal halide and high-pressure sodium luminaires are supplied with core and coil CSA/UL listed ballasts. All ballasts are guaranteed for at least 2 years directly from the ballast manufacturer. Components are horizontally opposed for thermal reduction. All components are mounted on a single plate for easy maintenance.

Pulse start metal halide luminaires are supplied with standard uniform pulse start systems suitable for universal lamp mounting. All components are mounted on a single plate for easy maintenance. Pulse start systems are guaranteed directly from the manufacturer for a period of 5 years.

Compact fluorescent: All compact fluorescent luminaires are supplied with electronic ballasts. Consult factory for dimming ballast to match controls and ballasts. Where the luminaire uses multiple ballasts, the ballasts are mounted on a single plate and can be individually removed.

Luminaires with multiple lamps use a single disc to mount all sockets.

Model #	Mounting	HID(wattage)		CFL(max wattage)	Voltage**		Color	Options
DB11AL22	Pxxx(length in inches) Pendant and length  WM Wall mounted	70MH-PS*	50HPS	8x 18DTT	TT	MT	CC-Custom Color *** BLK-Black WHT-White SIL-Silver BRZ-Bronze	QRT-Quartz re-strike REM-Remote emergency ballast F-Fusing CL-Conical lens DL-Drop lens WG-WireGuard FG-Flat glass
		100MH-PS*	70HPS	8x 26DTT	tri-tap	multi-tap		
		125MH-PS*	100HPS	8x 32TRT	120	120		
		150MH-PS*	150HPS	8x 42TRT	277	208		
		175MH-PS*	250HPS		347	240		
		250MH-PS*				277		

\*PS stands for pulse start  
 \*\* Not all voltages are available for all lamp types  
 \*\*\*Either supplying factory with a color chip or a RAL number can specify custom color. (Some custom colors will be subject to a small lot setup charge)

Ordering example:  
 DB11AL22-P36-100MH-PS-120-BRZ  
 This would order: Deco bay series with a 22" diameter reflector, pendant with a 36" stem, 100W MH-PS, 120V painted bronze.