




Diversified Architectural Lighting Inc.

939 Selkirk Ave., Pointe-Claire, Qc, Canada H9R 4S4
 Tel : 514.693.2117 Fax : 514.693.2177

Project :	Agent :
Type :	Approved by :
Cat No :	Date :

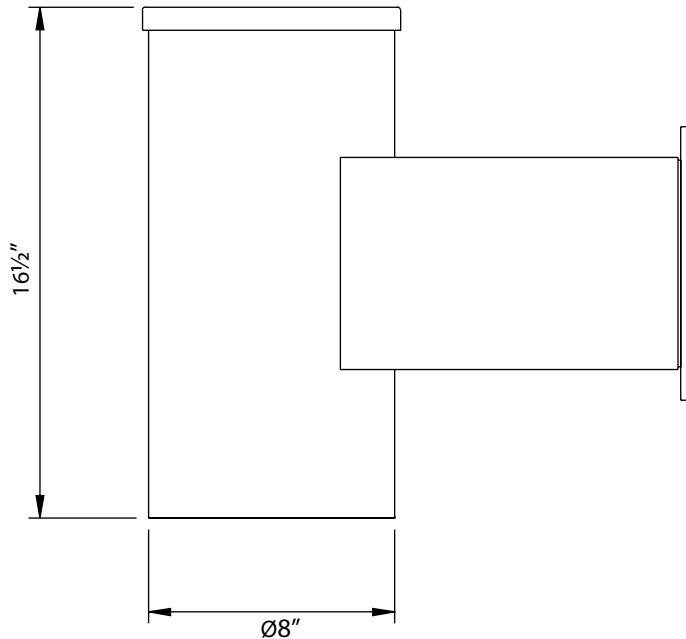

DK-OS

dramatek series

— Wall mount —

Luminaire

One-Piece solid aluminum cylinder houses a horizontal lamp in the middle of two anodized aluminum reflectors. Single lamp provides both up and down lighting. Heavy-duty aluminum arm houses the ballast which is mounted on a single plate. All lampholders are medium base rated 4KV c/w copper nickel plated screwshell.

Mounting

1/4" aluminum backplate has 4 holes in each corner to allow drilling to the wall over the junction box.

Optics

Anodized aluminum reflectors are positioned to furnish an equal amount of lighting in each orientation as well as matching patterns. Standard luminaire comes with 2 flat tempered glass lenses which can also be frosted or prismatic.

Protection/Enclosure

This luminaire is completely protected from dust and water in both up and down positions. Flat tempered glass is gasketed to a ring which is fastened to the cylindrical housing.

Electrical:

Standard metal halide and high-pressure sodium luminaires are supplied with core and coil CSA/UL listed ballasts. All ballasts are guaranteed for at least 2 years directly from the ballast manufacturer. Components are horizontally opposed for thermal reduction. All components are mounted on a single plate for easy maintenance.

Pulse start metal halide luminaires are supplied with standard uniform pulse start systems suitable for universal lamp mounting. All components are mounted on a single plate for easy maintenance. Pulse start systems are guaranteed directly from the manufacturer for a period of 5 years.

Compact fluorescent: All compact fluorescent luminaires are supplied with electronic ballasts. Consult factory for dimming ballast to match controls and ballasts. Where the luminaire uses multiple ballasts, the ballasts are mounted on a single plate and can be individually removed.

Model #	Mounting	HID(wattage)		CFL(wattage)	Voltage**		Color	Options
DKOS	WM Wall mounted	50MH-PS*	50HPS	18DTT	TT	MT	CC -Custom Color *** BLK -Black WHT -White SIL -Silver BRZ -Bronze	QRT -Quartz re-strike F -Fusing FG -Flat glass PL -Prismatic flat glass FL -Frosted lens
		70MH-PS*	70HPS	26DTT	tri-tap	multi-tap		
		100MH-PS*	100HPS	32TRT	120	120		
		150MH-PS*	150HPS	42TRT	277	208		
		175MH-PS*			347	240		
					277			

*PS stands for pulse start
 ** Not all voltages are available for all lamp types
 ***Either supplying factory with a color chip or a RAL number can specify custom color. (Some custom colors will be subject to a small lot setup charge)

Ordering example:
 DKOS-WM-100MH-PS-120-BRZ
 This would order: Dramatek wall mounted DKOS, 100W MH-PS, 120V painted bronze.